



User Manual





-

-

)'Q-Ø

-

-

LQW)

-

GLDHFU

RY

-

VFIHNDWKVDCZ

-

')

•

•

•

•

•

•

•

-
-
-



	Ω


--	--







			∞		

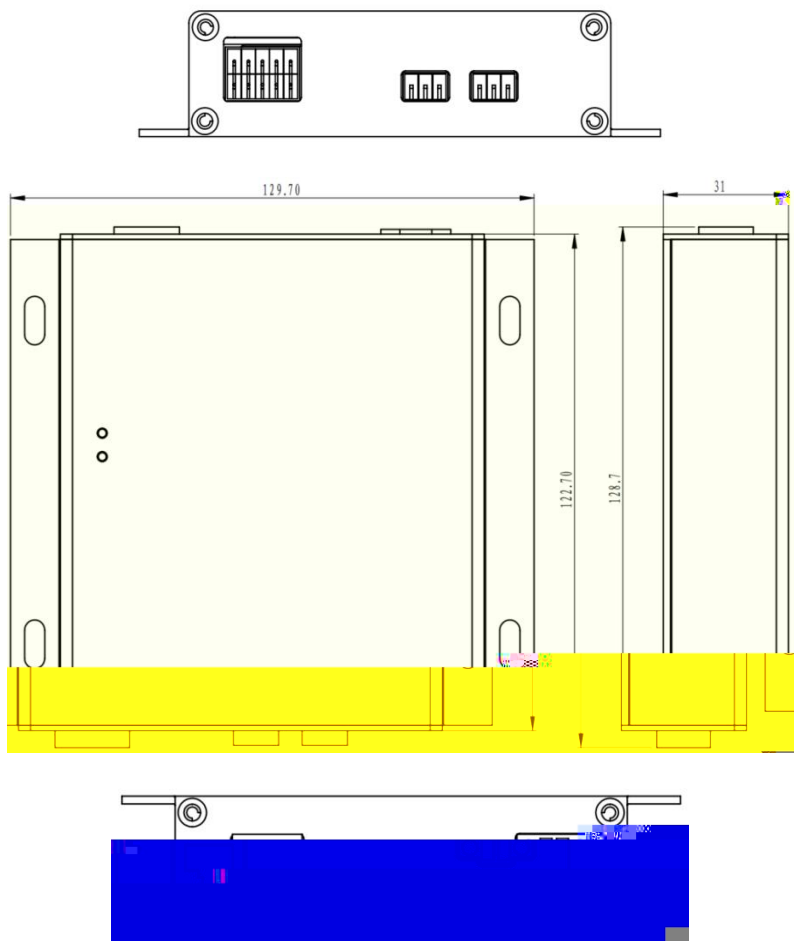














е / ѦѢѤ ѦѢѤ





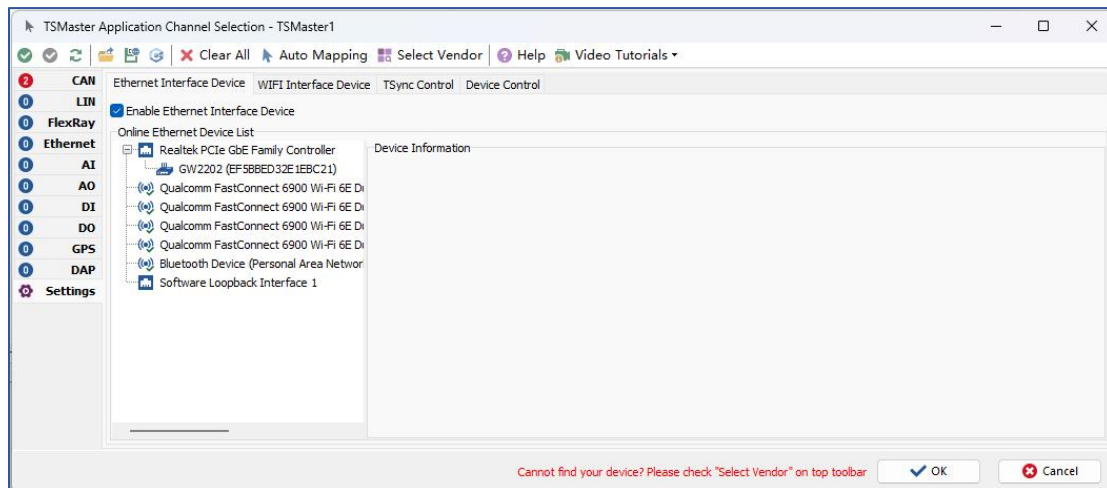
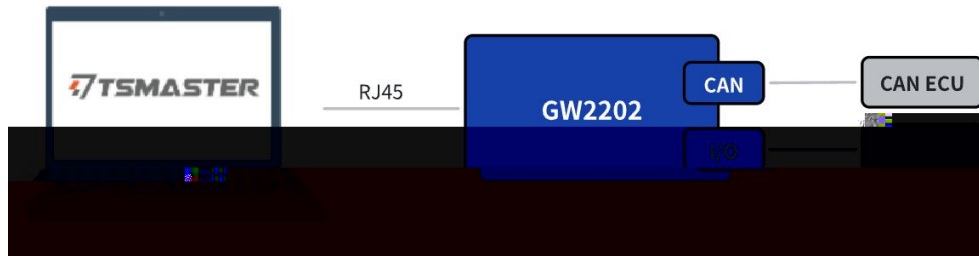


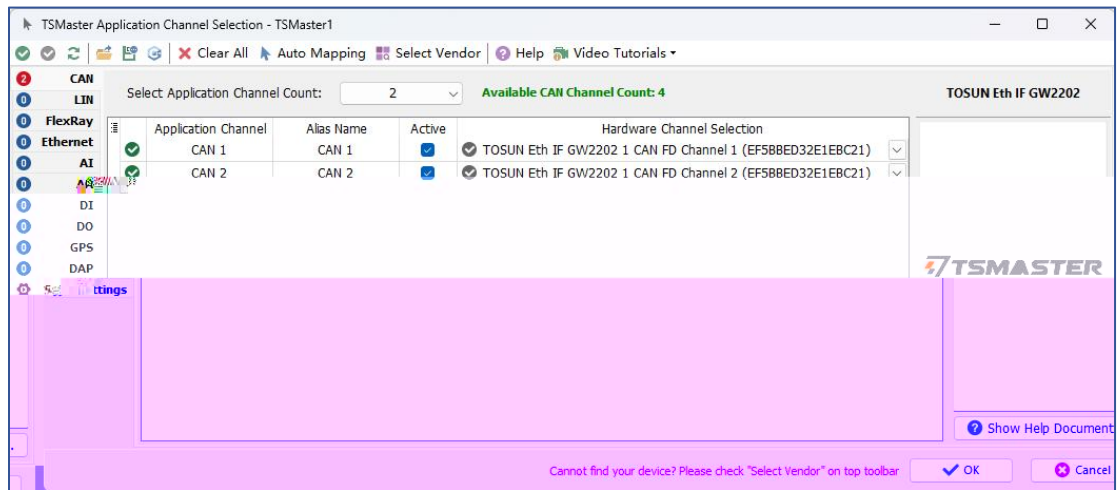
→


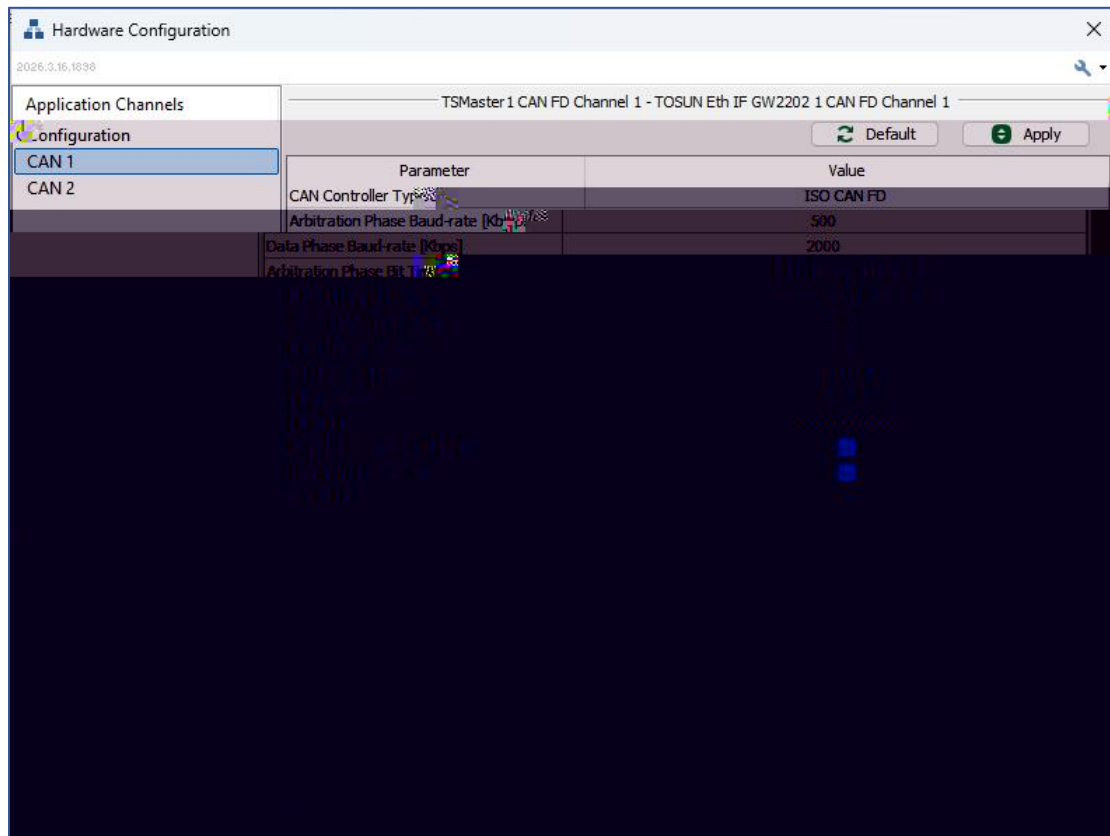




→

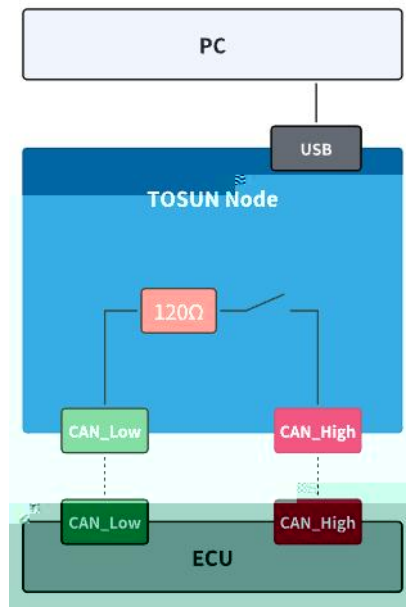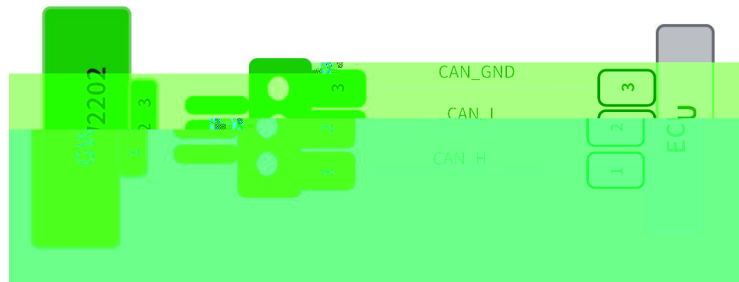

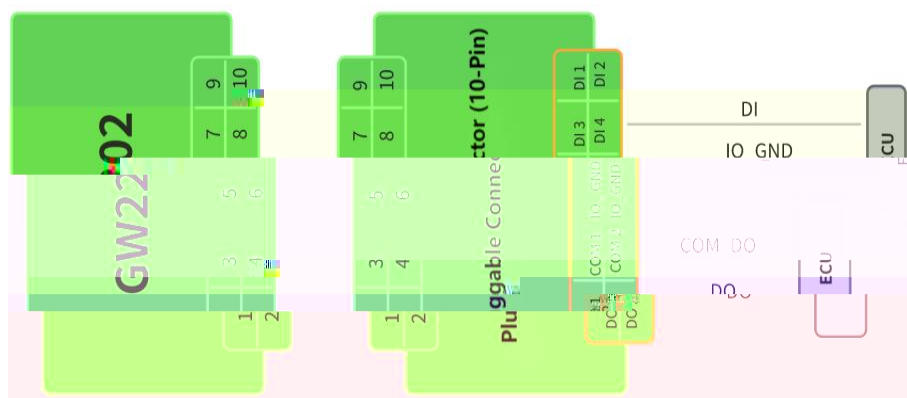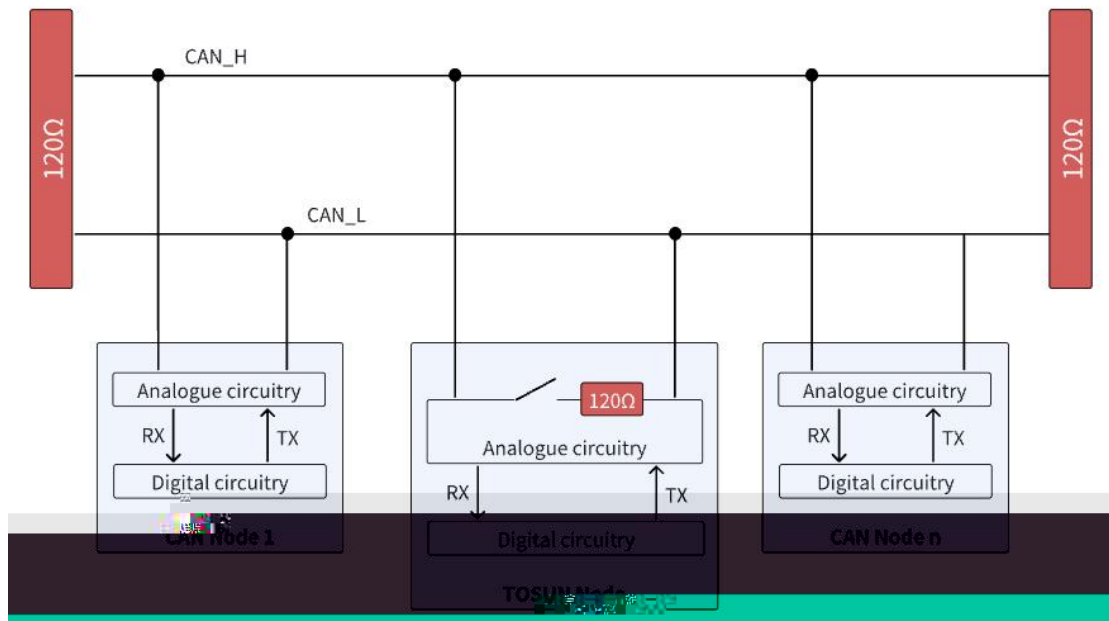


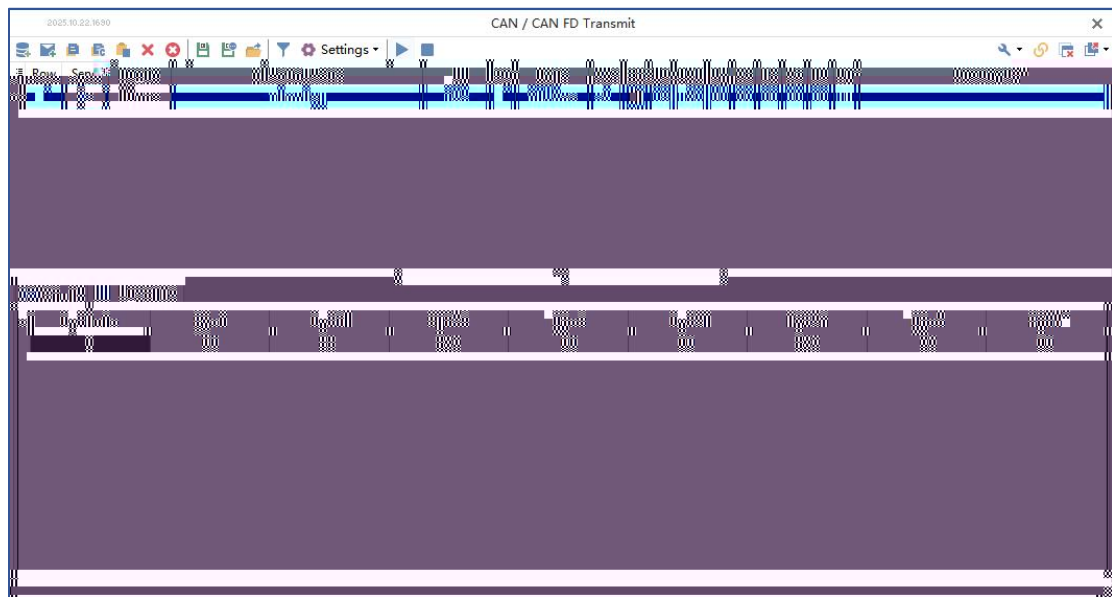


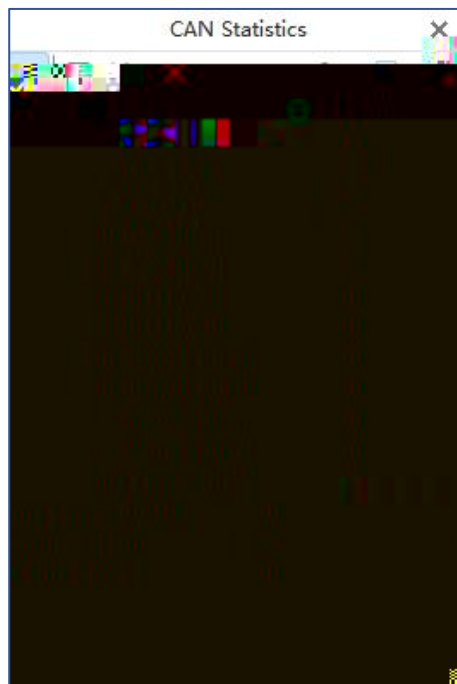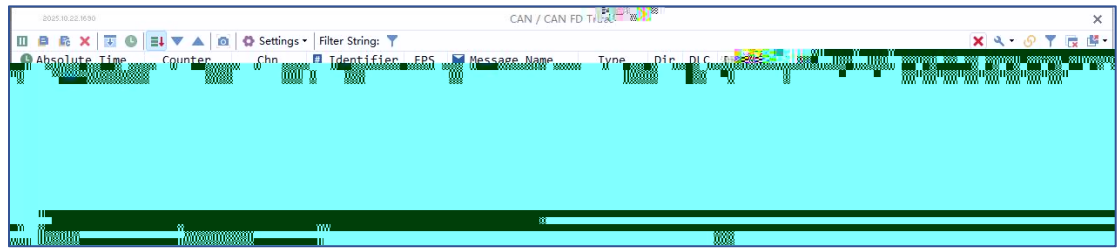


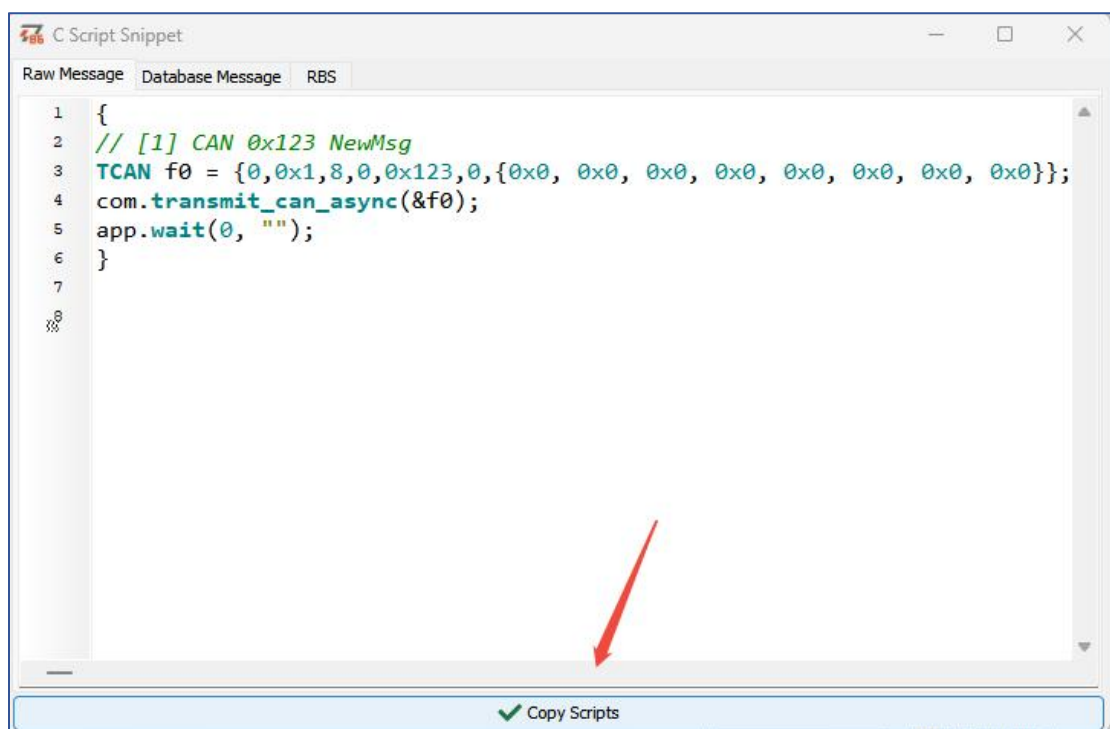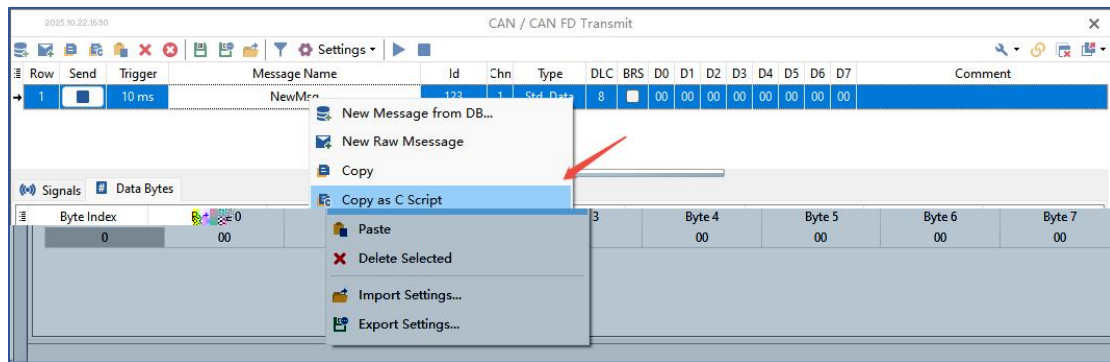


→


→

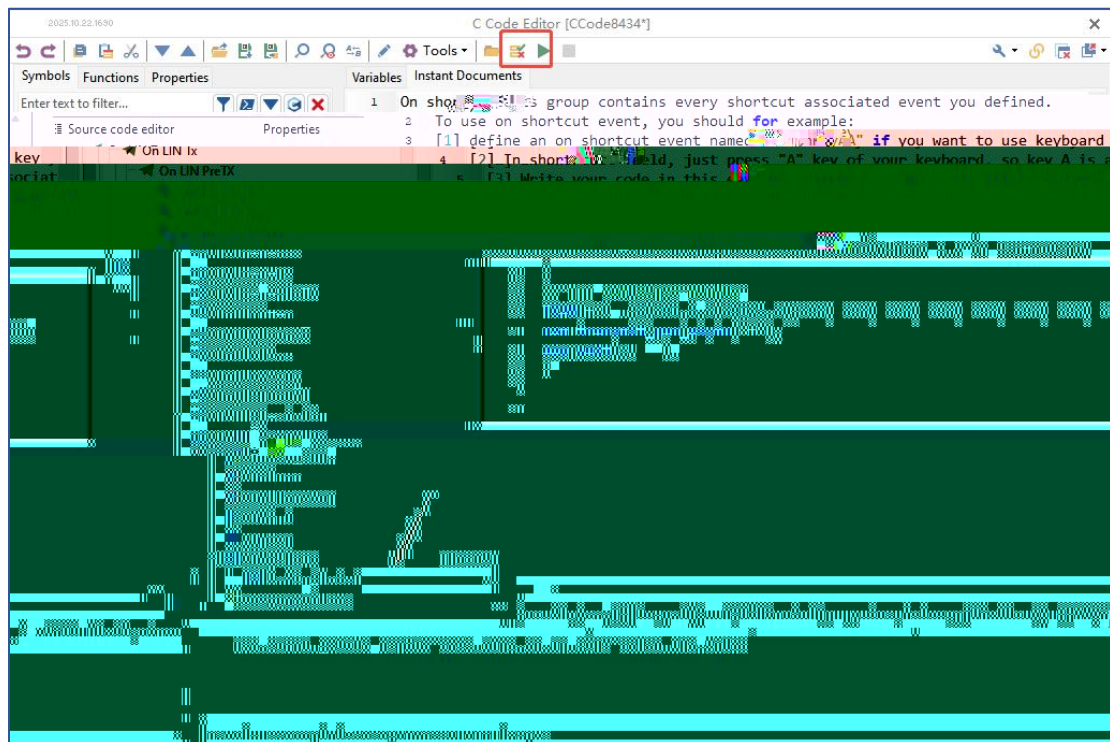
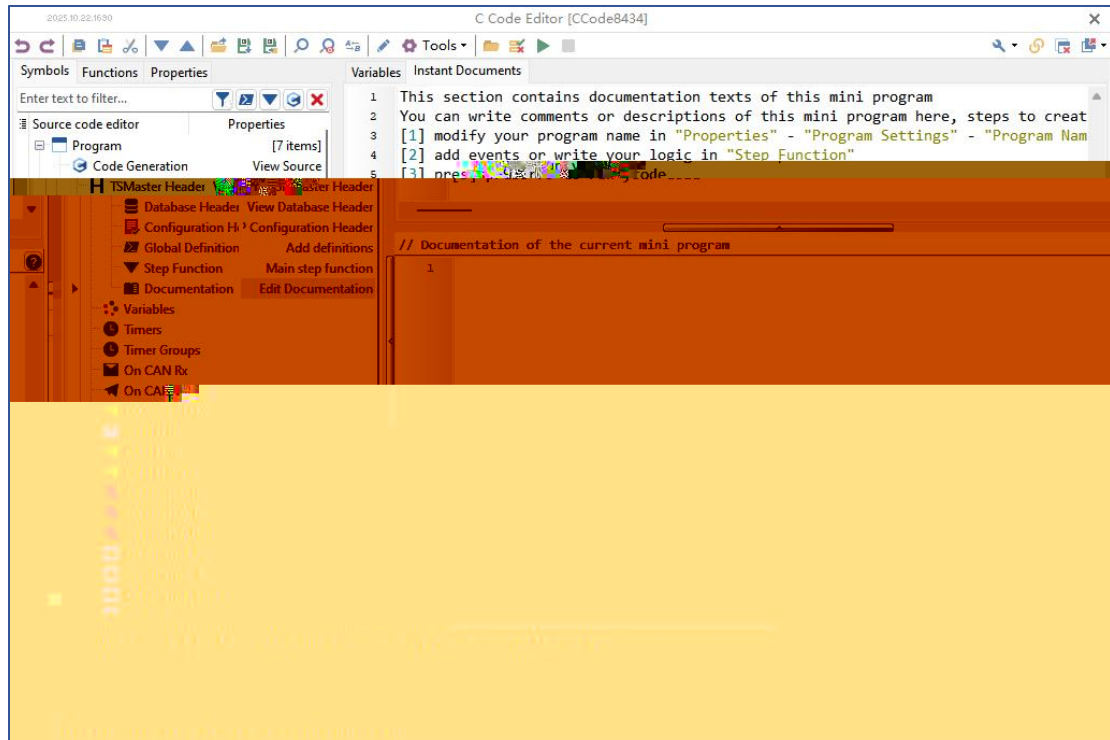



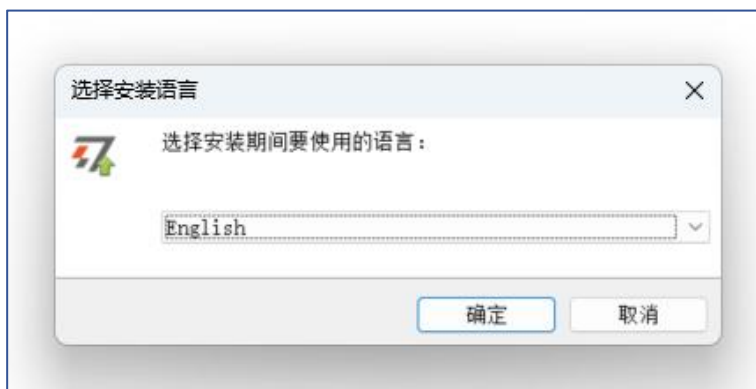


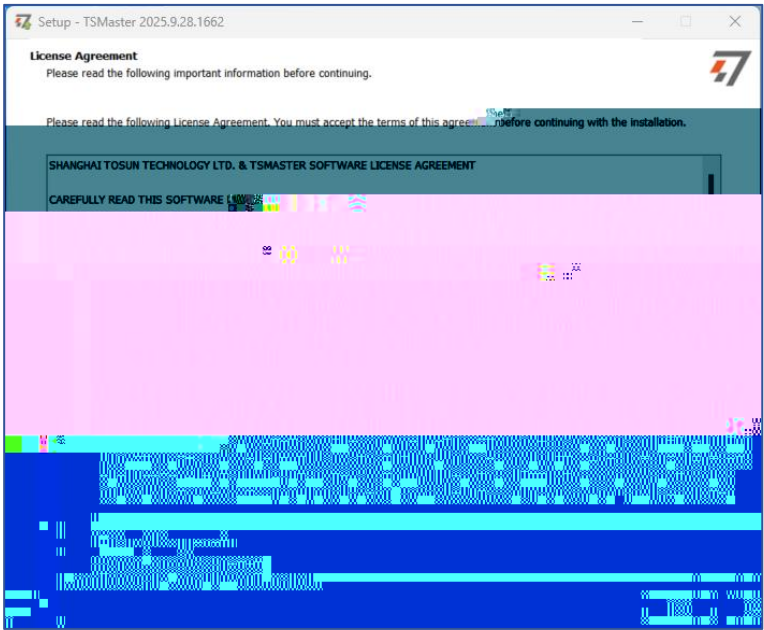

“

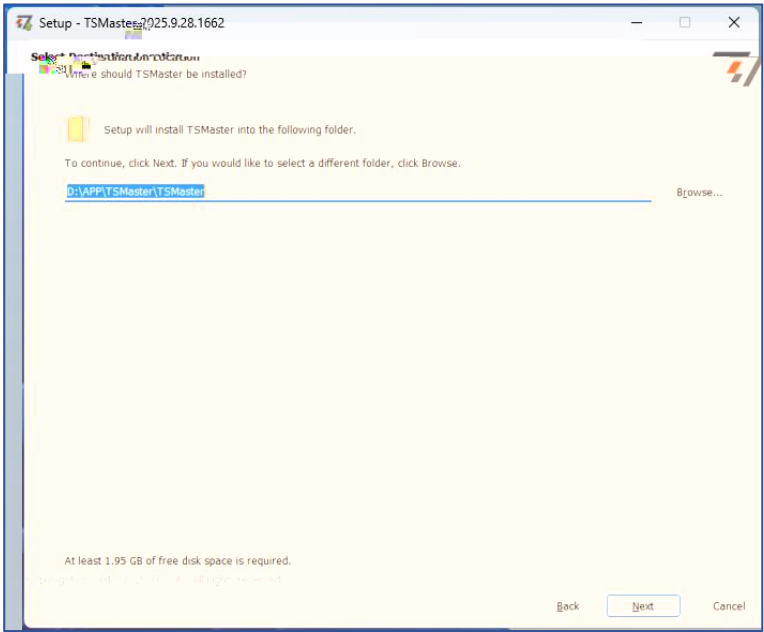

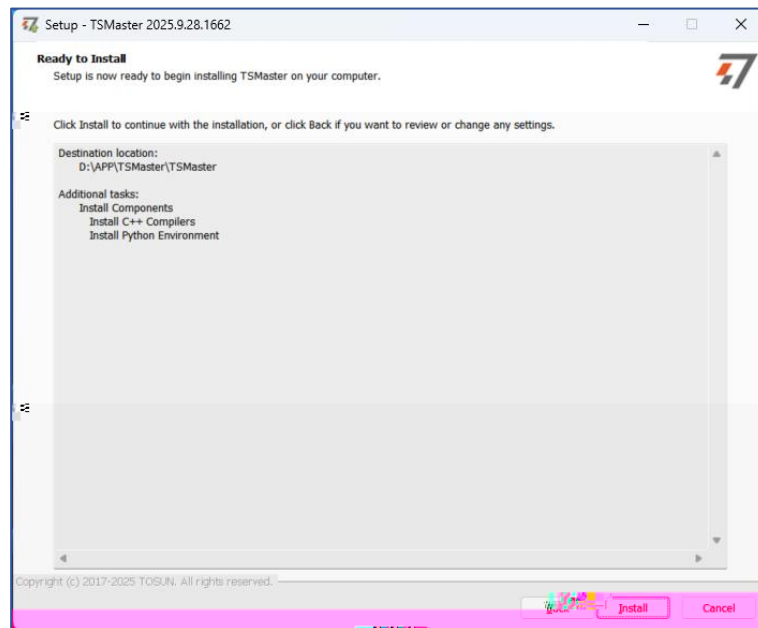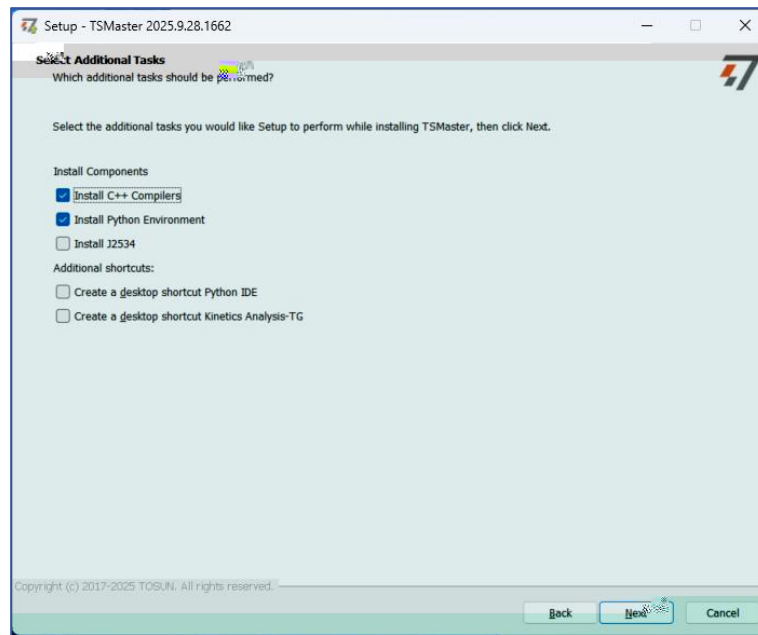

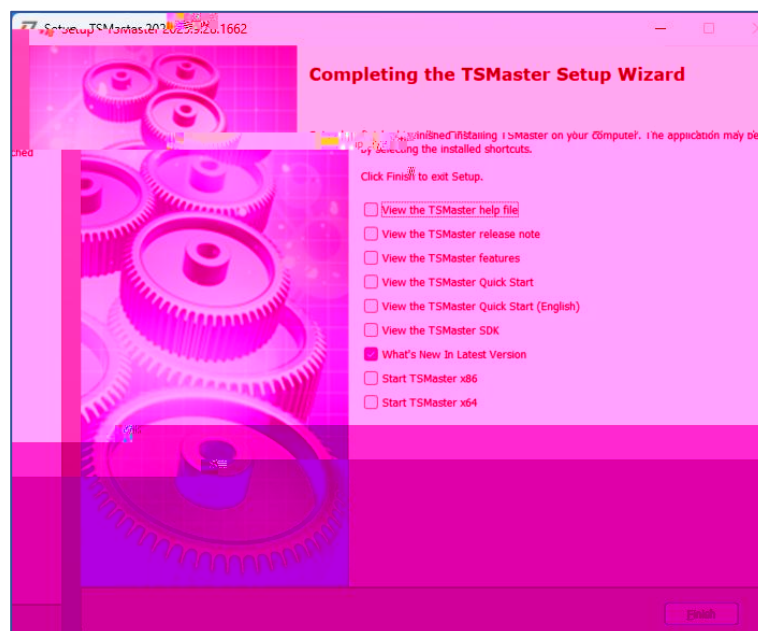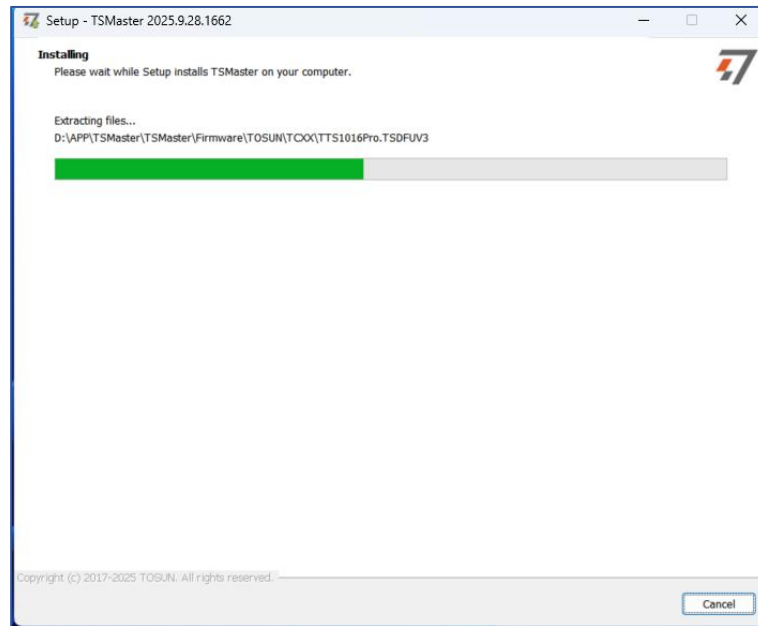





--	--	--	--






Software

support CAN FD (up to 1250Kbps) and DoIP
 support CAN FD (up to 1250Kbps) and DoIP

support CAN FD (up to 1250Kbps) and DoIP
 support CAN FD (up to 1250Kbps) and DoIP
 support CAN FD (up to 1250Kbps) and DoIP

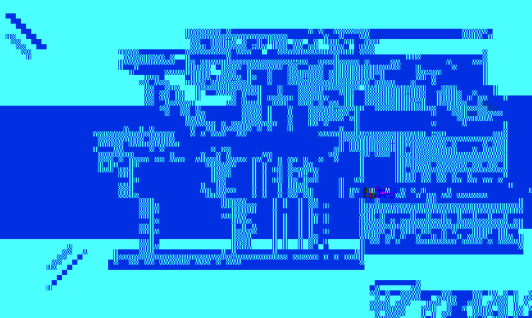

support CAN FD (up to 1250Kbps) and DoIP

Hardware

1/2/4/8/12-channel CAN FD/CAN to USB/PCIe device
 1/2/4/8/12-channel CAN FD/CAN to USB/PCIe device

1/2/4/8/12-channel CAN FD/CAN to USB/PCIe device
 1/2/4/8/12-channel CAN FD/CAN to USB/PCIe device

1/2/4/8/12-channel CAN FD/CAN to USB/PCIe device

1/2/4/8/12-channel CAN FD/CAN to USB/PCIe device

- High-speed CAN FD/CAN to USB/PCIe device
- High-speed CAN FD/CAN to USB/PCIe device
- High-speed CAN FD/CAN to USB/PCIe device






1/2/4/8/12-channel CAN FD/CAN to USB/PCIe device





Software

- High-speed CAN FD/CAN to USB/PCIe device
- High-speed CAN FD/CAN to USB/PCIe device
- High-speed CAN FD/CAN to USB/PCIe device
- High-speed CAN FD/CAN to USB/PCIe device
- High-speed CAN FD/CAN to USB/PCIe device
- High-speed CAN FD/CAN to USB/PCIe device



Hardware

1/2/4/8/12-channel CAN FD/CAN to USB/PCIe device
 1/2/4/8/12-channel CAN FD/CAN to USB/PCIe device



1/2/4/8/12-channel CAN FD/CAN to USB/PCIe device
 1/2/4/8/12-channel CAN FD/CAN to USB/PCIe device

